

HD VIDEO STUDIO




HS-2000 5-Channel Full HD Mobile Studio

The Datavideo HS-2000 is a compact, broadcast quality HD-SDI mobile video studio, ideal as a fly away kit.

The HS-2000 is a five channel 10-bit 1080i or 720p HD-SDI, HD-Component and DVI-D video & audio switcher, with advanced features such as a 17-inch multi-image video monitor displaying each source, pre-view and program, a complete six way intercom system supplied with five belt packs, 14 pre-stored logos, digital clock display, five user set up, title overlay and DVI-D input ideal for use with presentation software.

The integrated audio mixer with balanced XLR connectors allows up to four channels microphone or line level audio inputs.

To avoid the mess and inconvenience of individual power supplies, Datavideo HS-2000 comes with an integrated power distribution centre. Providing a simple, safe and secure solution for connecting all the integrated equipment from a single socket

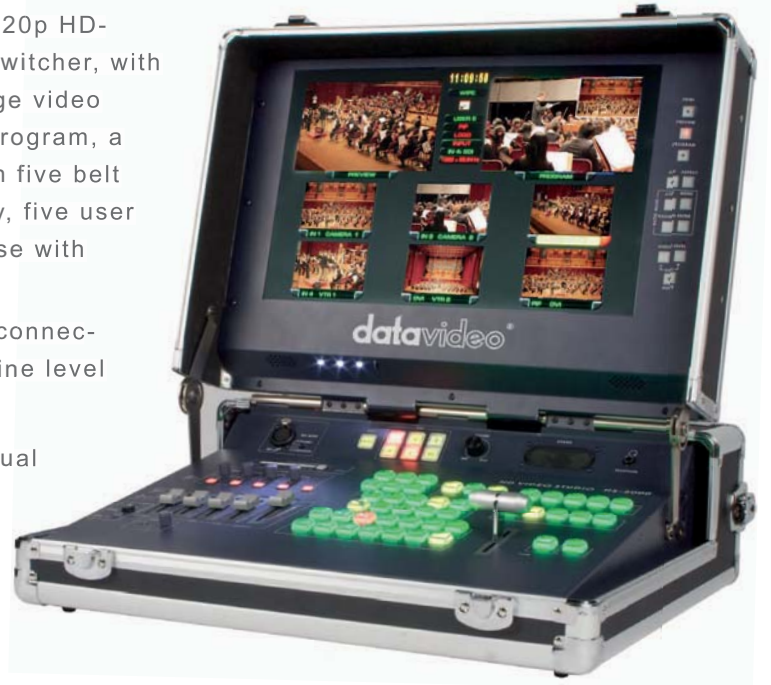

Whether you're working in worship, education, conducting a live outside broadcast or shooting inside a production studio, the Datavideo SE-2000 enables seamless switching of video and audio, blending high quality digital content on the fly without requiring external genlock, thanks to built in TBC.

FEATURES

- Full HD 1920x1080i and 1280x720p
- Input configuration: 4 x HD-SDI & 1 x DVI-D or 3 x HD-SDI & 2 x DVI-D.
- 2 x HD-SDI & 1 x HD-YUV full HD video output
- 17-inch multi-image video monitor displaying each source, pre-view and program
- Built in digital clock and 5 logo store
- Lumakey function for text overlay
- 4 XLR microphone or line audio input
- Picture in Picture function
- Built in 5 channels dual channel Intercom system with five camera man belt packs with dual colour tally light indicator
- Dual colour tally light
- Seamlessly switching between all sources, thanks to the built in TBC & frame synchronizer that synchronizes all inputs without the need for external genlock of the cameras.
- Integrated power distribution centre. Providing a simple and secure solution for connecting all the integrated equipment from a single socket


APPLICATIONS



FRONT VIEW




REAR VIEW

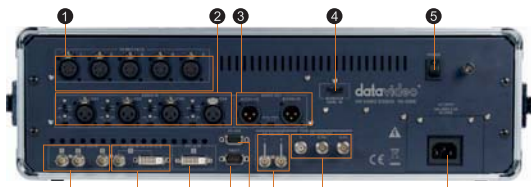

- ① Belt pack connectors
- ② Audio input
- ③ Audio output
- ④ Monitor HDMI input
- ⑤ Power on/off
- ⑥ HD-SDI input
- ⑦ HD-SDI/DVI-D input
- ⑧ DVI-D input
- ⑨ TALLY output
- ⑩ RS-232
- ⑪ HD-SDI output
- ⑫ HD-YUV output
- ⑬ Power


SYSTEM DIAGRAM

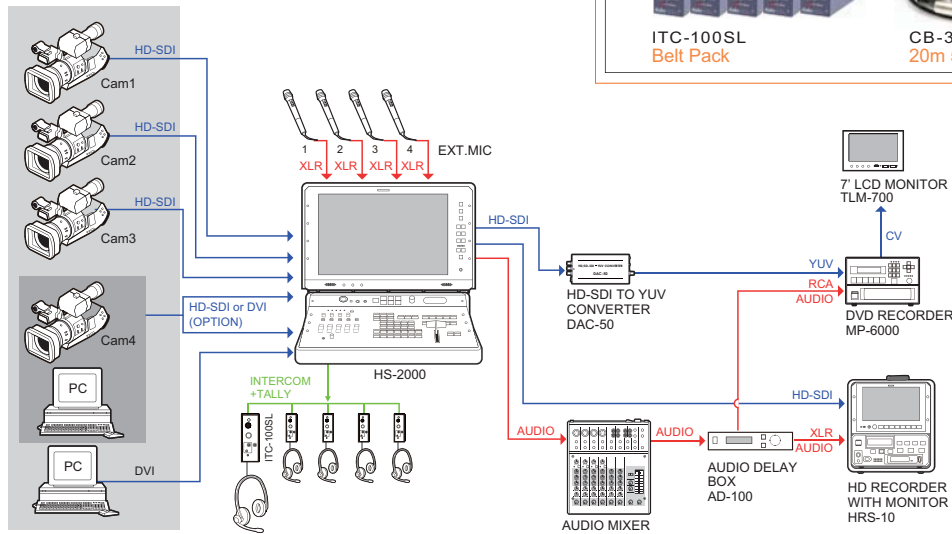

Included



DIAMENSION

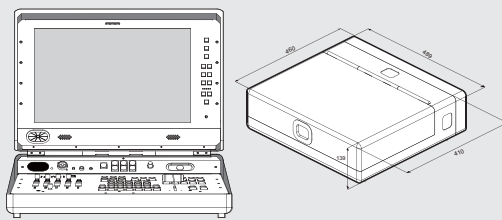

SIZE: 460x499x139mm
 POWER: 100-240V AC, 60 Hz / 50 Hz, 3A, 36W Max
 WEIGHT: 15KG

OPTIONAL ACCESSORIES



Datavideo Technologies Co. Ltd
 10F, No. 176, Jian 1st Rd., Chung Ho City
 Taipei Hsien 235, Taiwan,
 R.O.C.
 Tel: +886-2-8227-2888
 Fax: +886-2-8227-2777
 E-mail: service@datavideo.com.tw

Datavideo Corporation
 7048 Elmer Avenue,
 Whittier, CA 90602,
 U.S.A.
 Tel: +1-562-696 2324
 Fax: +1-562-698 6930
 E-mail: contactus@datavideo.us

Datavideo Technologies Europe BV
 Floridareef 106
 3565 AM Utrecht,
 The Netherlands
 Tel: +31-30-261 96 56
 Fax: +31-30-261 96 57
 E-mail: info@datavideo.nl

Datavideo UK Limited
 Unit 2 Waterside Business Park Hadfield,
 Glossop,
 Derbyshire SK13 1BE, UK
 Tel: +44-1457 851000
 Fax: +44-1457 850964
 E-mail: sales@datavideo.co.uk

Datavideo Technologies China Co
 2F-D, No. 2, Lane 777 West
 Guangzhong Rd, Zhabei District
 Shanghai, China
 Tel: +86 21-5603 6599
 Fax: +86 21-5603 6770
 E-mail: service@datavideo.cn

Datavideo Hong Kong Ltd
 G/F, 26 Cross Lane
 Wanchai, Hong Kong
 Tel: +852-2833-1981
 Fax: +852-2833-9916
 E-mail: info@datavideo.com.hk

Datavideo Technologies (S) PTE Ltd
 No. 22 Lorong 21A Geylang,
 #09-02 Prosper Industrial Bldg,
 Singapore 388431
 Tel: +65-6749 6866
 Fax: +65-6749 3266
 E-mail: sales@datavideo.sg